


### 3D-SENSOR NG WITH INTEGRATED SHORT ADAPTER

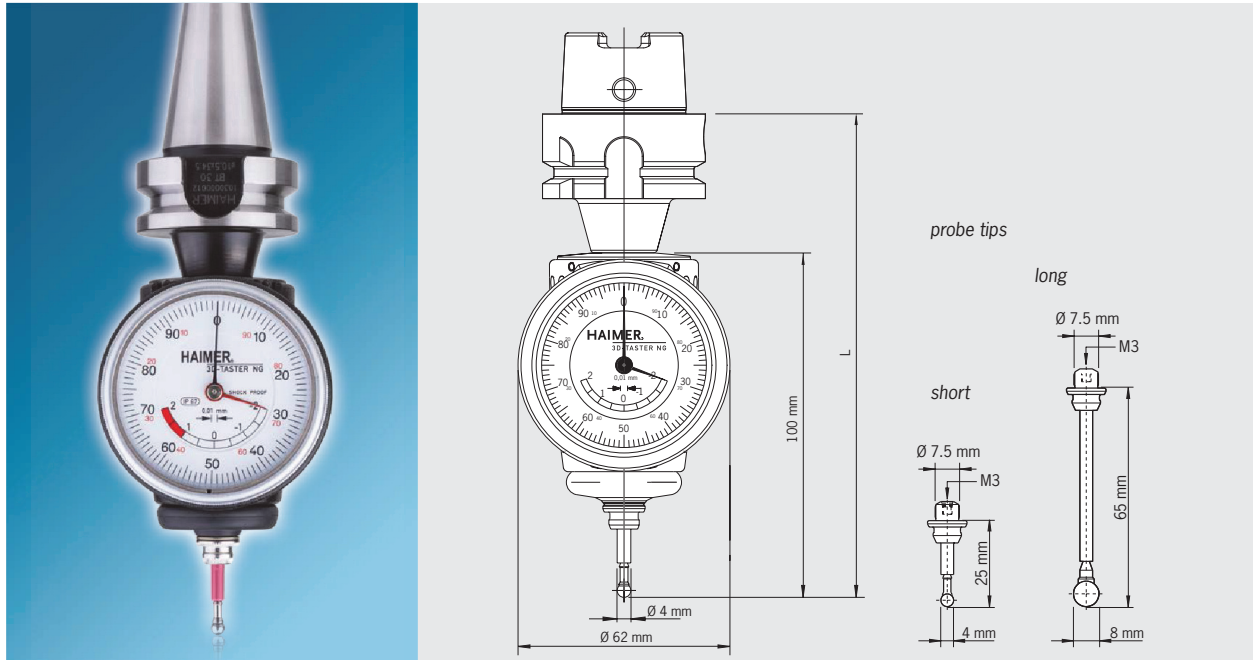

**For interfaces SK30, BT30, HSK-25/32/40/50/63**

Simple workpiece measuring with less space in the machine.

**Version:**

- With integrated short adapter available in taper sizes SK30, BT30, HSK-A32/40/50/63, HSK-E25/32/40/50
- No further manual runout adjustment necessary! Delivery with preset runout accuracy at the probe tip of 0.01 mm
- Measuring accuracy: 0.01 mm
- Short and long probe tips available, no tool change necessary
- No re-calibration of the sensor is needed
- Enhanced overrun distance
- IP 67 waterproof

**Application:**

- For small Milling and EDM machines (insulated probe)
- For workpiece-reset and length measuring
- Approach from any direction (X-, Y-, Z-axis)

**Technical details**


**3D-Sensor NG with integrated short adapter including short probe tip Ø 4 mm**

Accuracy	0,01 mm	
<b>Article</b>	<b>Order No.</b>	<b>L [mm]</b>
3D-Sensor NG with short adapter HSK-E25	80.363.E25NG	129.5
3D-Sensor NG with short adapter HSK-E32	80.363.E32NG	139.5
3D-Sensor NG with short adapter HSK-E40	80.363.E40NG	139.5
3D-Sensor NG with short adapter HSK-E50	80.363.E50NG	146.5
3D-Sensor NG with short adapter HSK-A32	80.363.A32NG	139.5
3D-Sensor NG with short adapter HSK-A40	80.363.A40NG	139.5
3D-Sensor NG with short adapter HSK-A50	80.363.A50NG	146.5
3D-Sensor NG with short adapter HSK-A63	80.363.A63NG	150
3D-Sensor NG with short adapter SK30	80.364.30NG	139.1
3D-Sensor NG with short adapter BT30	80.365.30NG	138.5

**Accessories**

Short Probe tip Ø 4 mm  
**Order No. 80.362.00**

Long Probe tip Ø 8 mm  
**Order No. 80.363.00**

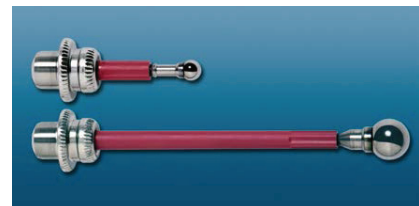

Short probe tip Ø 4 mm  
 Long probe tip Ø 8 mm

Technical data subject to change without prior notice